

# CARGO CAPE™ Installation & care


## Installation:

1) Align and then attach the two headrest (A) straps around the back of your vehicle's rear seat head rests. Adjust so product is flush with seats and your vehicles cargo area.

2) Once product is aligned, press down on Velcro points (G) to secure the cape. Be aware the Velcro is an added feature, and will only attach to certain seat fabric and flooring. We have also included extra adhesive to be used if needed.

3) The bumper flap (E) is optional and can be secured under the Kurgo label located at the tailgate of your vehicle for on-and-off use. Here you will also find an extra flap that can be placed underneath your vehicles floor mat for extra stability.

4) The zipper feature (B) allows you to simply unzip for up and down seat movement, without having to remove the entire Cargo Cape.

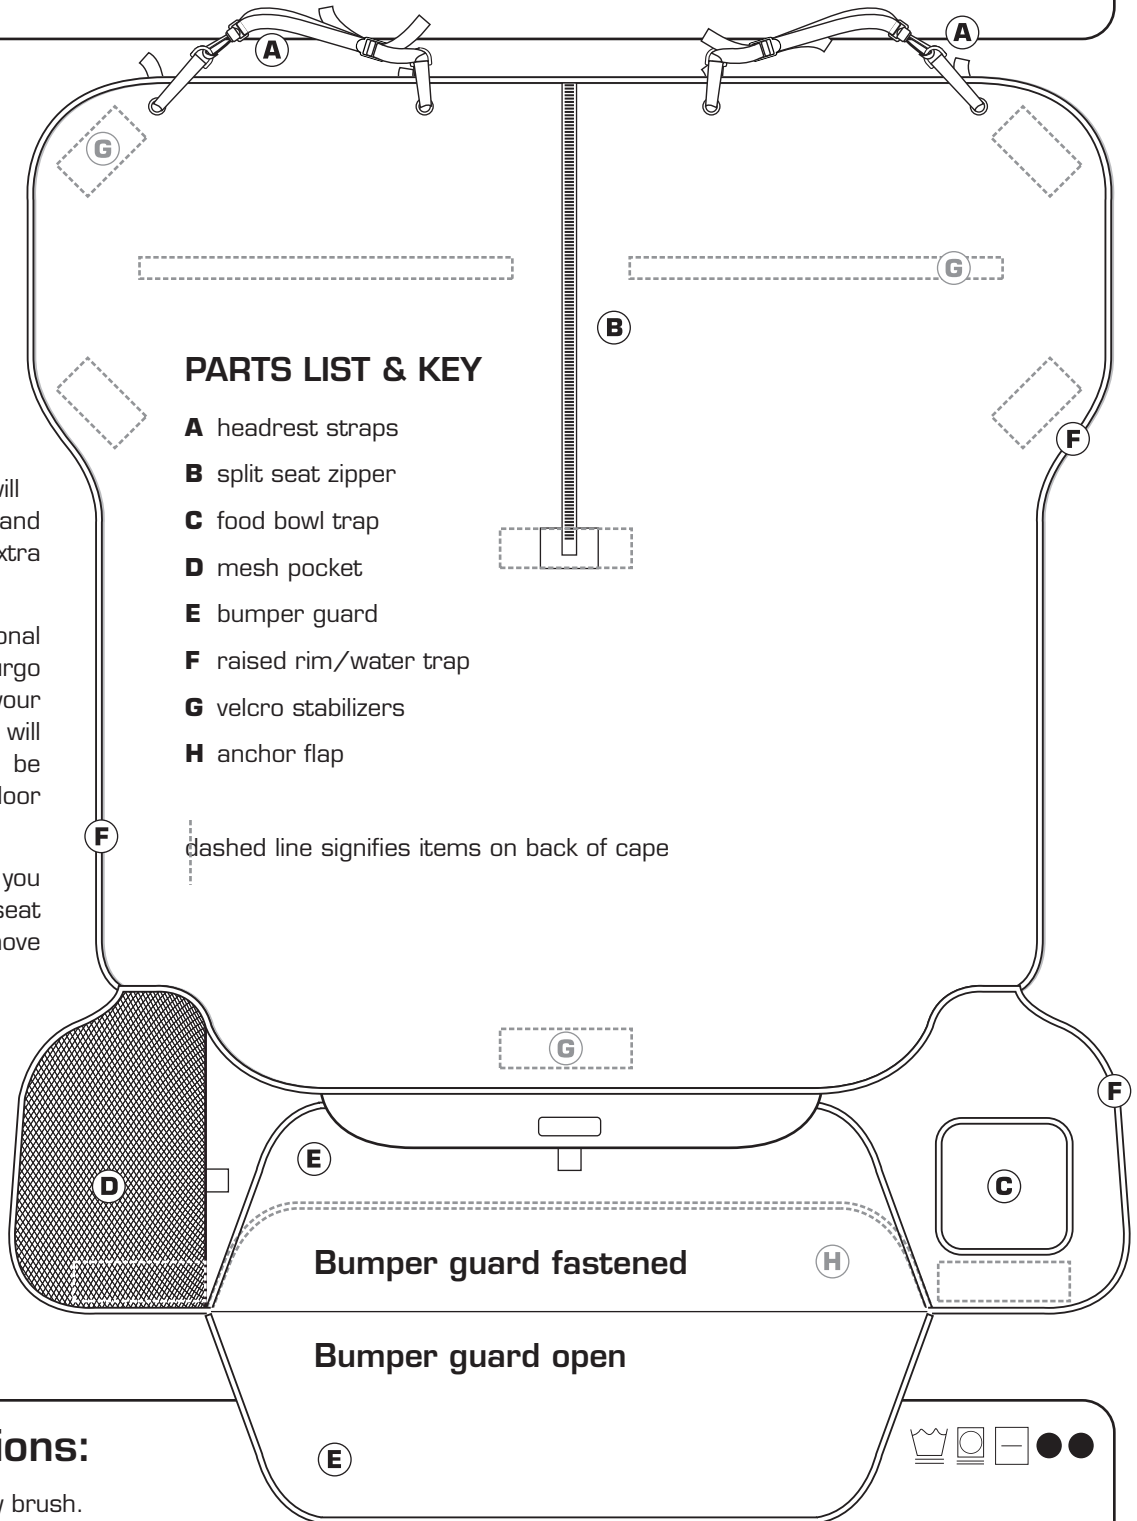

## PARTS LIST & KEY

- A** headrest straps
- B** split seat zipper
- C** food bowl trap
- D** mesh pocket
- E** bumper guard
- F** raised rim/water trap
- G** velcro stabilizers
- H** anchor flap

dashed line signifies items on back of cape



Become a fan of Kurgo on Facebook so you can receive all the latest updates, giveaways and contests.

## Washing instructions:

- Brush off loose dirt with a dry brush.
- As needed, wipe off with a damp sponge and mild soap.
- Rinse only, if possible. Use cold water and a sponge or rinse in a tub without soap.
- Machine wash in front-loading unit (DO NOT use machine with agitator, agitator could cause damage not covered under warranty) with cold water and mild soap (Ivory Flakes, Woolite, Sport Wash, Etc.) No detergents.
- Rinse thoroughly to eliminate soap residue.
- Lay flat to dry.

